

LowandMean.com

928.680.6660

## YAMAHA WARRIOR REAPER FRONT FENDER

Part # LM-04-200

# INSTRUCTIONS

LM-04-200 includes:	<b>WARNING:</b> Do not install with the motor warm. This is an install at your own risk. If you are not capable to install successfully then we highly suggest you take this item to a professional shop. Always check the fit before sending this product off to paint.
Just instructions	


### Suggestions for install:

1) Make sure your bike is stable either on the kick stand or a bike stand before you begin.

2) Remove the current front fender that is on your bike.

3) You will use your stock hardware to attach the New Reaper front fender.

4) To install the front fender you will need to squeeze the fender past the fork tubes. We suggest using some masking tape to protect your fork tubes from damaging your paint job. Refer to image A. You'll need to place your hands on each side for the LM front fender near the mounting holes. Squeezing the fender in just enough so the fork tubes fit in the channels of the LM Fender. You'll see in image A that we are

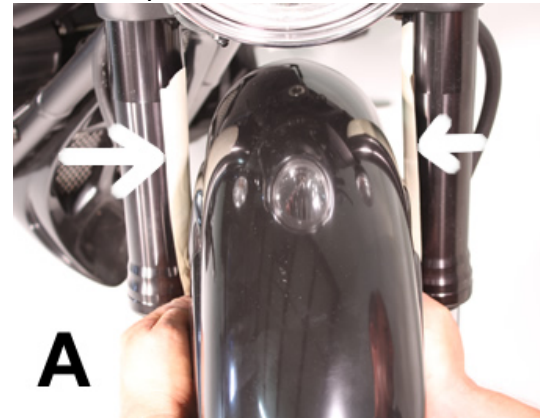

squeezing the fender above the fatter bottom portion of the fork tubes.

5) Once you have the fender in place, use your stock hardware to tighten the fender down.

6) The fender is not drilled for the stock brake cable bracket. If you want this bracket you will have to drill a hole in the fender and modify your stock bracket to fit. This bracket is not necessary and on most custom bikes it's removed.

7) USE LOCKTITE on final install; evenly snug each bolt till the fender sits in place.

8) Check fit and firmness after your first ride of showing off your **Nice bike™**.

Please contact our Tech support if you have any issues or questions about install

[Techsupport@LowandMean.com](mailto:Techsupport@LowandMean.com) or 928-680-6660

© 2006-2014 Low and Mean L.L.C.™, All rights reserved.